

12" MONITORORL0411000
Monitor 12" RLED R4

- 12-30V DC
- Driftstemperatur fra -40 til +85 °C
- XGA 1024xRGBx768 pixels
- Robust design

**PRODUKTBESKRIVELSE**

Orlacos 12" monitorer er IP67-klassifisert. Passer godt til applikasjoner hvor du vil se mer enn ett bilde om gangen, for eksempel når du ønsker å bruke Orlacos "Surroundview". Disse produktene har automatisk lysjustering, og vil hele tiden tilpasse seg forandringer i omgivelsene.

Eksempel på applikasjon

TEKNISKE DATA

Bildeformat	04:03
IP-klasse	IP67
Kabellengde	4000 mm
Matespenning DC maks.	30 V DC
Matespenning DC min.	12 V DC
Størrelse display	12
Temperaturområde fra	-40 °C
Temperaturområde til	85 °C
Type	Analog
Vibrasjonsbestandig	50g

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- 1 = Red = Power input: 12...30V
 - 2 = White = Power input: 0V
 - 3 = Blue = Cam No. 1 activated at 12...30V
 - 4 = Brown = Cam No. 2 activated at 12...30V
 - 5 = White/Yellow = Cam No. 3 activated at 12...30V
 - 6 = Grey = Aux 1 activated at 12V...30V
 - 7 = Yellow = Aux 2 activated at 12V...30V
- Shielding = To GND



Front side molded 4p female connector:

- 1 = Coax core = Video input
 - 2 = Coax shielding = Video 0V
 - 3 = Red = Power output: 12...30V
 - 4 = Black = Power output: 0V
- Shielding = To housing





Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- 1 = Red = Power input: 12...30V
 - 2 = White = Power input: 0V
 - 3 = Blue = Cam No. 1 activated at 12...30V
 - 4 = Brown = Cam No. 2 activated at 12...30V
- Solder side 7p female connector:
- 1 = Coax core = Video input
 - 2 = Coax shielding = Video 0V
 - 3 = Red = Power output: 12...30V
 - 4 = Black = Power output: 0V
 - 5 = Orange = RS232 In
 - 6 = Yellow = RS232 Out
 - 7 = Grey = Video 2 input
- Shielding to housing

- 5 = White/Yellow = Cam No. 3 activated at 12...30V
 - 6 = Grey = Aux 1 activated at 12...30V
 - 7 = Yellow = Aux 2 activated at 12...30V
- Shielding to GND

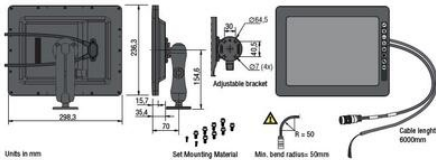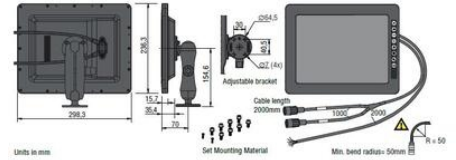

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- 1 = Red = Power input: 12...30V
 - 2 = White = Power input: 0V
 - 3 = Blue = Cam No. 1 activated at 12...30V
 - 4 = Brown = Cam No. 2 activated at 12...30V
 - 5 = White/Yellow = Cam No. 3 activated at 12...30V
 - 6 = Grey = Aux 1 activated at 12V...30V
 - 7 = Yellow = Aux 2 activated at 12V...30V
- Shielding = To GND



Front side molded 4p female connector:

- 1 = Coax core = Video input
 - 2 = Coax shielding = Video 0V
 - 3 = Red = Power output: 12...30V
 - 4 = Black = Power output: 0V
- Shielding = To housing



Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- 1 = Red = Power input: 12...30V
 - 2 = White = Power input: 0V
 - 3 = Blue = Cam No. 1 activated at 12...30V
 - 4 = Brown = Cam No. 2 activated at 12...30V
- Solder side 7p female connector:
- 1 = Coax core = Video input
 - 2 = Coax shielding = Video 0V
 - 3 = Red = Power output: 12...30V
 - 4 = Black = Power output: 0V
 - 5 = Orange = RS232 In
 - 6 = Yellow = RS232 Out
 - 7 = Grey = Video 2 input
- Shielding to housing

- 5 = White/Yellow = Cam No. 3 activated at 12...30V
 - 6 = Grey = Aux 1 activated at 12...30V
 - 7 = Yellow = Aux 2 activated at 12...30V
- Shielding to GND

