

DYNAMISK- / MASTKABEL

ORL0304371

Dynamisk 4P kabel, 0.5m

- 4- og 7-pols M16 støpte kontakter
- Mykt ytre med liten bøyeradius
- Driftstemperatur fra -40 til +85 °C




PRODUKTBESKRIVELSE

Egnet for bruk i bevegelige applikasjoner, for eksempel koblet til et redskapskamera som sitter montert på en arm, en gravemaskinbom eller på en tippbil.


TEKNISKE DATA

IP-klasse	IP67
Kabeldiameter	9 mm
Kabellengde	500 mm
Materiale	PUR
Temperaturområde fra	-40 °C
Temperaturområde til	85 °C
Type	Analog






Electrical connection

1 = coax core Video
2 = coax shielding Video GND
3 = red 12...30V/DC
4 = black 0V
Orange N.C.
Yellow N.C.
Grey N.C.







Electrical connection

Soldering of connectors (female 1311250 + male 1322450)
1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

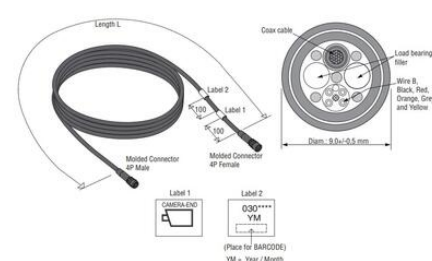

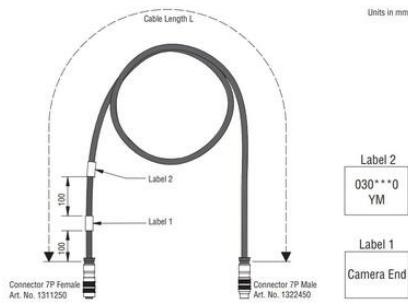

Electrical connection

1 = coax core
2 = coax shielding
3 = red
4 = black
Orange
Yellow
Grey


Video
Video GND
12...30V/DC
0V
N.C.
N.C.
N.C.



Electrical connection

Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3



Dimensions

