

MULTIKABEL

ORL0301960

Multikabel 4P 1m

- 4- og 7-pols M16 støpte kontakter
- Utviklet for beste EMC-beskyttelse
- Driftstemperatur fra -40 til +85 °C




PRODUKTBESKRIVELSE


Orlaco utvikler sin egen kabling for å oppnå best mulig bildekvalitet og EMC-beskyttelse. Støpte kontakter betyr at de har god fuktighetsbeskyttelse. Multikabelen er beregnet for statisk montering. Dersom du ønsker at kablingen skal brukes til en mobil applikasjon, se serien for dynamiske kabling.

TEKNISKE DATA

IP-klasse	IP67
Kabeldiameter	6 mm
Kabellengde	1000 mm
Kontakter	4-polt hann, 4-polt hunn
Materiale	PVC
Temperaturområde fra	-40 °C
Temperaturområde til	85 °C
Type	Analog



Front side female connector



Front side male connector

Electrical connection

1 = Coax core = Video signal
2 = Coax shielding = Video GND
3 = Red = 12V/DC
4 = Black (0V) = 0V
Shielding = GND



Front side molded 7P Female connector





Front side molded 7P Male connector


Electrical connection molded connectors

1 = Coax Core
2 = Coax Shield
3 = Red (Power input)
4 = Black (0V)
5 = Orange (Rx)
6 = Yellow (Tx)
7 = Grey (Aux)

Dimensions

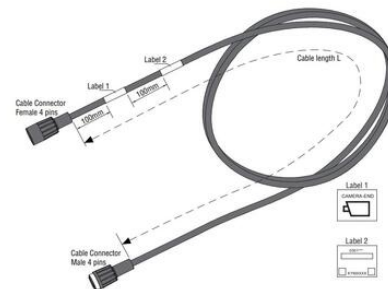

Front side female connector



Front side male connector

Electrical connection

1 = Coax core = Video signal
2 = Coax shielding = Video GND
3 = Red = 12V/DC
4 = Black (0V) = 0V
Shielding = GND



Front side molded 7P Female connector



Front side molded 7P Male connector

Electrical connection molded connectors

1 = Coax Core
2 = Coax Shield
3 = Red (Power input)
4 = Black (0V)
5 = Orange (Rx)
6 = Yellow (Tx)
7 = Grey (Aux)

Dimensions

