



0510 / 0511 - SERIEN

Elektronisk trykkbryter Hex 24

0510200411013

0-2Bar, G1/4", 1xPNP, NO, DIN-A

- Liten og kompakt trykkbryter
- SS303
- NO / NC
- Fra 0 til +250 Bar

PRODUKTBESKRIVELSE

Bruk filteret under varianter for å finne dine spesifikasjoner.

Finnes ikke ønskede spesifikasjoner i listen, ta kontakt med oss




TEKNISKE DATA

GENERELL DATA


Arbeidsområde min.	0 bar
Arbeidsområde maks.	2 bar
Trykk maks.	4 bar
Elektrisk tilkobling	DIN EN 175301-803-A
IP-klasse	IP65
Materiale hus	1.4305
Materiale medieberørte deler	NBR, 1.4305
Materiale membran	NBR
Mediatemperatur fra	-30 °C
Mediatemperatur til	100 °C
Omgivelsestemperatur fra	-30 °C
Omgivelsestemperatur til	100 °C
Prosesstilkobling	G1/4
Vekt	110 g

Trykkstigning	≤ 1 bar/ms
Brytertid	< 4 ms

Maks sjokk	500m / s ² ; 11 ms halv sinus kurve; DIN EN 60068-2-27
Matespenning DC maks.	32 V DC
Matespenning DC min.	9,6 V DC
Utsignal	PNP
Vibrasjonsbestandig	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6
Sprengtrykk	8 bar
EMC	EMC 2014/30/EU; EN 61000-6-2:2005; EN 61000-6-3:2007
Funksjon	Elektronisk

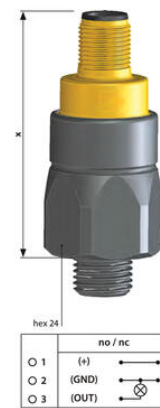

<p>DIN EN 175301-803-A</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>U/nc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>M/nc</td></tr> <tr><td>4</td><td>M/nc</td></tr> </table> <p>IP67 x = 60 mm without cable x = 77 mm with cable Order number: 013</p>	Pin	Assignment	1	U/nc	2	Gnd	3	M/nc	4	M/nc	<p>M 12 - DIN EN 61076-2-101-A</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>U/nc</td></tr> <tr><td>2</td><td>A</td></tr> <tr><td>3</td><td>Gnd</td></tr> <tr><td>4</td><td>M/nc</td></tr> </table> <p>IP67 x = 54 mm Order number: 002</p>	Pin	Assignment	1	U/nc	2	A	3	Gnd	4	M/nc	<p>ISO 15170-A1-41</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>U/nc</td></tr> <tr><td>2</td><td>A</td></tr> <tr><td>3</td><td>Gnd</td></tr> <tr><td>4</td><td>M/nc</td></tr> </table> <p>IP67, IP69K x = 56 mm Order number: 004</p>	Pin	Assignment	1	U/nc	2	A	3	Gnd	4	M/nc
Pin	Assignment																															
1	U/nc																															
2	Gnd																															
3	M/nc																															
4	M/nc																															
Pin	Assignment																															
1	U/nc																															
2	A																															
3	Gnd																															
4	M/nc																															
Pin	Assignment																															
1	U/nc																															
2	A																															
3	Gnd																															
4	M/nc																															
<p>AMP Superseal 1.57</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>M/nc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>U/nc</td></tr> </table> <p>IP67 x = 60 mm Order number: 007</p>	Pin	Assignment	1	M/nc	2	Gnd	3	U/nc	<p>Deutsch DF06-3P</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>A</td><td>U/nc</td></tr> <tr><td>B</td><td>Gnd</td></tr> <tr><td>C</td><td>M/nc</td></tr> </table> <p>IP67, IP69K x = 60 mm Order number: 018</p>	Pin	Assignment	A	U/nc	B	Gnd	C	M/nc	<p>Thread code: 41</p>	<p>Thread code: 09</p>													
Pin	Assignment																															
1	M/nc																															
2	Gnd																															
3	U/nc																															
Pin	Assignment																															
A	U/nc																															
B	Gnd																															
C	M/nc																															



<p>DIN EN 175301-803-A</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>U/nc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>M/nc</td></tr> <tr><td>4</td><td>M/nc</td></tr> </table> <p>IP67 x = 60 mm without cable x = 77 mm with cable Order number: 013</p>	Pin	Assignment	1	U/nc	2	Gnd	3	M/nc	4	M/nc	<p>M 12 - DIN EN 61076-2-101-A</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>U/nc</td></tr> <tr><td>2</td><td>A</td></tr> <tr><td>3</td><td>Gnd</td></tr> <tr><td>4</td><td>M/nc</td></tr> </table> <p>IP67 x = 54 mm Order number: 002</p>	Pin	Assignment	1	U/nc	2	A	3	Gnd	4	M/nc	<p>ISO 15170-A1-41</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>U/nc</td></tr> <tr><td>2</td><td>A</td></tr> <tr><td>3</td><td>Gnd</td></tr> <tr><td>4</td><td>M/nc</td></tr> </table> <p>IP67, IP69K x = 56 mm Order number: 004</p>	Pin	Assignment	1	U/nc	2	A	3	Gnd	4	M/nc
Pin	Assignment																															
1	U/nc																															
2	Gnd																															
3	M/nc																															
4	M/nc																															
Pin	Assignment																															
1	U/nc																															
2	A																															
3	Gnd																															
4	M/nc																															
Pin	Assignment																															
1	U/nc																															
2	A																															
3	Gnd																															
4	M/nc																															
<p>AMP Superseal 1.57</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>M/nc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>U/nc</td></tr> </table> <p>IP67 x = 60 mm Order number: 007</p>	Pin	Assignment	1	M/nc	2	Gnd	3	U/nc	<p>Deutsch DF06-3P</p> <table border="1"> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>A</td><td>U/nc</td></tr> <tr><td>B</td><td>Gnd</td></tr> <tr><td>C</td><td>M/nc</td></tr> </table> <p>IP67, IP69K x = 60 mm Order number: 018</p>	Pin	Assignment	A	U/nc	B	Gnd	C	M/nc	<p>Thread code: 41</p>	<p>Thread code: 09</p>													
Pin	Assignment																															
1	M/nc																															
2	Gnd																															
3	U/nc																															
Pin	Assignment																															
A	U/nc																															
B	Gnd																															
C	M/nc																															