

## SERIE HPV

### Høytrykksventil

#### HPV-SERIEN

#### Høytrykksventil

- Nominelt trykk: 300 bar
- Temperaturråde: -20 til 70 °C
- Vekt: 0,65 kg



D41935

## PRODUKTBESKRIVELSE

### Applikasjoner

- Høytrykksystemer
- Høyflow-systemer
- Egnet for gassapplikasjoner med renhet opptil 5.0
- Kan brukes på hovedlinjer
- Kan brukes i spesialtilpassede panelløsninger


### Fordeler

- Ingen forurensning av gassen takket være heldekkende metallkonstruksjon
- Svært høy flow
- Pålitelig design
- Dokumentert og sikker konstruksjon
- Lang levetid
- Enkel å installere og vedlikeholde
- Valgfri fargekoding på håndtaket for enkel identifisering

Example for selecting a part number:

D41935	AO	GO
TYPE	GASES	CONNECTIONS
D41935 - Straight valve DN 10	AO - Oxygen, non-corrosive gases and gas mixtures with more than 20% O <sub>2</sub>	GO - Standard G 1/2 female
V09041 - Straight valve with seat G 1/8" and seat G 1/8" coupling nut		
D41936 - Angle valve DN 10 not for Oxygen and Carbon above 20 bar	AR - Non-corrosive gas mixtures	GO - Standard G 1/2 female

### High Pressure Valve Drawings

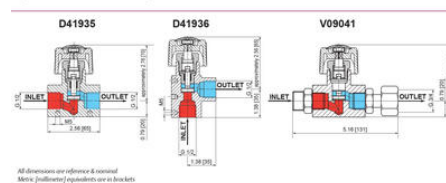


All dimensions are reference & nominal  
 Metric dimensioned quantities are in brackets

Example for selecting a part number:

D41935	AO	GO
TYPE	GASES	CONNECTIONS
D41935 - Straight valve DN 10	AO - Oxygen, non-corrosive gases and gas mixtures with more than 20% O <sub>2</sub>	GO - Standard G 1/2 female
V09041 - Straight valve with seat G 1/8" and seat G 1/8" coupling nut		
D41936 - Angle valve DN 10 not for Oxygen and Carbon above 20 bar	AR - Non-corrosive gas mixtures	GO - Standard G 1/2 female

### High Pressure Valve Drawings

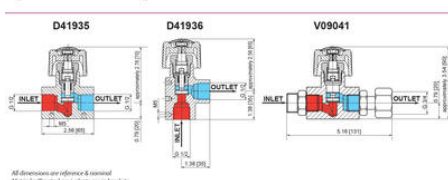

All dimensions are reference & nominal  
 Metric dimensioned quantities are in brackets

