OEM AUTOMATIC | Bjørnstjerne Bjørnsonsgate 110, 3044 Drammen, Norway
Phone 32 21 05 05 | post@oem.no | www.oem.no

BERØRINGSFRI BRYTERE MMC-H

131105
MMC-H Høyre 2M 2NC 1NO



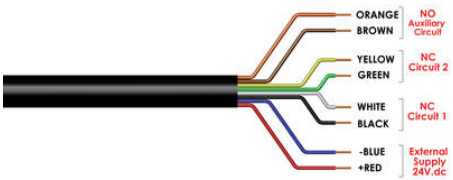
- Magnetkodet
- Opp til PL d ved seriekobling
- IP67/IP69K
- -25°C - 105°C

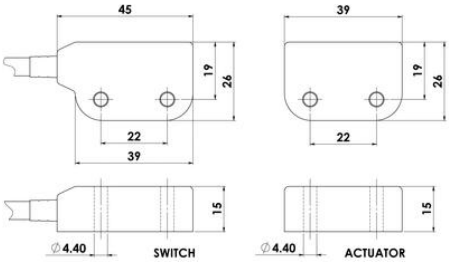
PRODUKTBESKRIVELSE

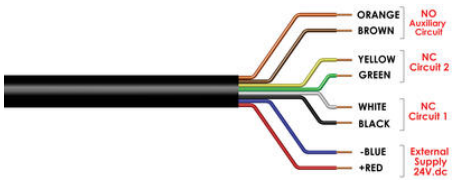
IDEM's MMC-H serie er magnetkodet, non-contact sikkerhetsbrytere som har blitt utviklet for bruk på maskiner og utstyr for å ivareta sikkerheten for operatører. De er egnet for direkte kontaktsoner ihht. EHEDG retningslinjer. Gjennomgående hullfeste som muliggjør frontmontering med sekskantbolter for å ikke gi matfelleområder.

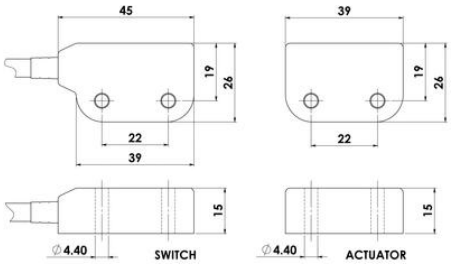
TEKNISKE DATA

Arbeidstemperatur	-25° - 105°C
Contact rating max	24Vdc 0.2A
Feste	2 x M4
Godkjenninger	ISO 14119, EN60947-5-1, EN60204-1, ISO 13849-1, EN62061, UL 508
Integrert LED	Ja
IP-klasse	IP67, IP69K
Kabellengde	2 m
Kontaktfunksjon	2NC 1NO
Lederareal	0,25 mm²
Materiale sentral	SS316
PFHd	8.71 x 10^{-11}
PL	upp till Ple
Recommended mounting gap	5 mm
SIL	upp till SIL3
Switching current min	10Vdc 1mA
Vekt	220 g


ORANGE
BROWN
NO
Auxiliary
Circuit
YELLOW
GREEN
NC
Circuit 2
WHITE
BLACK
NC
Circuit 1
-BLUE
+RED
External
Supply
24V.dc


45
19
26
22
39
15
⌀4.40
SWITCH
39
19
26
22
15
⌀4.40
ACTUATOR


ORANGE
BROWN
NO
Auxiliary
Circuit
YELLOW
GREEN
NC
Circuit 2
WHITE
BLACK
NC
Circuit 1
-BLUE
+RED
External
Supply
24V.dc


45
19
26
22
39
15
⌀4.40
SWITCH
39
19
26
22
15
⌀4.40
ACTUATOR