

KLM-P2L

202021

Sikkerhetsbryter 24V M20 UTEN AKTUATOR

- 8 forskjellige nøkkelposisjoner
- IP67
- LED indikator
- Max. 3000N
- Støpt metall







PRODUKTBESKRIVELSE

KLM-P2L sikkerhetslås har en slank støpt kropp og en holdekraft opp til 3000N for å holde middels til store beskyttelsesdører lukket til farene er fjernet. 24VDC må tilføres solenoiden for å holde beskyttelsen låst.





TEKNISKE DATA

Arbeidstemperatur	-25..40°C
Feste	4 x M5
Godkjenninger	ISO 13849-1, ISO 14119, EN60204-1, EN62061, EN60947-5-1, UL 508
Holding force (F1Max)	3000 N
IP-klasse	IP67
Isolasjonsspennning	600V ac
Kabelgjennomføring	M20
Kontaktfunksjon	3NC 1NO
Materiale hode	Formstøpt metall
Materiale sentral	Formstøpt metall
Maximum approach / withdrawal speed	600 mm/s
PFHd	3.44×10^{-8}
PL	e acc. ISO13849-1
SIL	3 acc. EN62061

Solenoid Voltage	24V dc
Spinning AC maks.	2500V ac
Termisk strøm (Ith)	5 A
Travel for positive opening	10 mm
Utnyttelseskategori	AC15, A300, 3 A

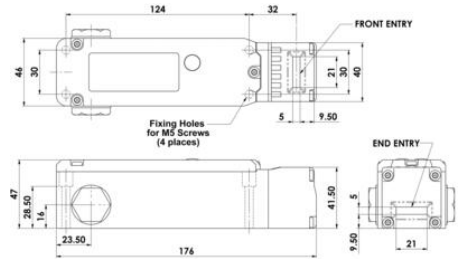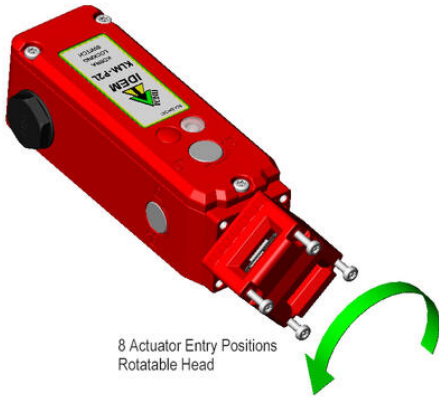

	6.0	5.0	0mm
11/12	Open	Solenoid Energised	
21/22	Open	Solenoid Energised	
33/34	Open	Tongue Inserted	
43/44		Open	Tongue Inserted

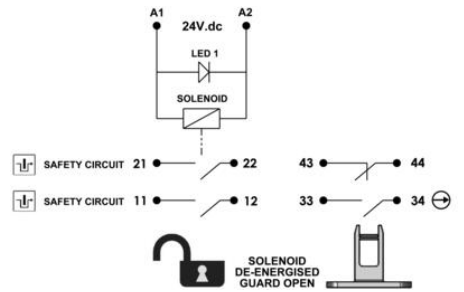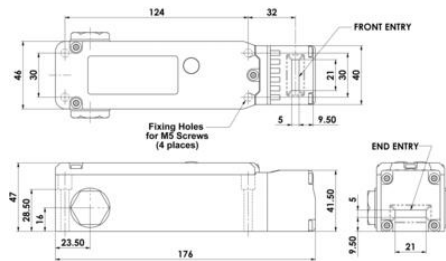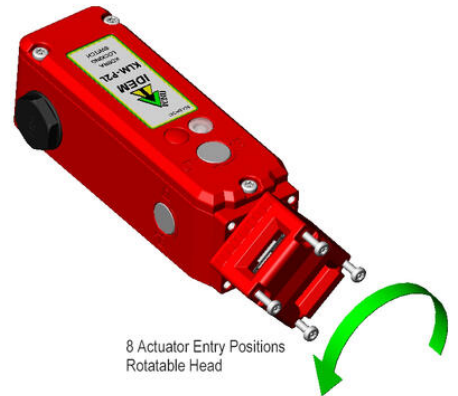

6.0 5.0 0mm

11/12	Open	Solenoid Energised
21/22	Open	Solenoid Energised
33/34	Open	Tongue Inserted
43/44	Open	Tongue Inserted