

KABELGJENNOMFØRING

KES, KES-R, KES-GB

28630.4

KES 13/24 Skruemontert kabelgjennomføring, svart



- For kabeldiametre fra 3,2 mm til 20,5 mm
- Dobbel tetning til IP66
- Ecolab-godkjent
- Polyamid 6.6 glassfiberforsterket kjerne
- Integrert strekkavlastning i henhold til EN62444

PRODUKTBESKRIVELSE

Med kabelgjennomføringssystemet KES kan umonterte kabler eller pneumatiske slanger raskt føres inn i koblingsskap eller maskinhus uten bruk av verktøy. KES kabelgjennomføring har en formstabil og riflet ramme laget av glassfiberarmert polyamid, dekket med et elastisk materiale.

TEKNISKE DATA

GENERELL INFO

Type	KES
Montering	Skruer
Farge	Svart
IP-klasse	IP66
NEMA class	4x
Antall kabler	13 pc
Antall kabler x kabel diameter	10 x 3.2mm-6.3mm, 3 x 16.0mm-20.5mm
Lengde	149,6 mm
Bredde	58 mm
Monteringshøyde	14,5 mm

MONTERINGSINFORMASJON

Wall thickness	N/A
Utsparingslengde	112 mm
Width of cutout	36 mm
Antall skruer	4 pc
Diameter på skruer	5,5 mm
Festeskrue	M5

Torque of the fixing screws	3
-----------------------------	---

MATERIALE

Materiale	Polyamid 6.6
Glassfiberforsterket	Ja
Flammeklasse	V-0
Tetningsmateriale	TPE
Silikonfri	Ja
Halogenfri	Ja
Temperaturområde drift fra	-40 °C
Temperaturområde drift til	90 °C

GODKJENNINGER

UL test standard	UL 508A
cUL test standard	C22.2 No. 14-18

ØVRIG DATA

Tolltariffnummer	39259020
Opprinnelsesland	DE
Vekt	109,1 g
Forpakkingsstørrelse	10 pc



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw-on mount with threaded bushes and latching clips



Using the latching clips, the KES-G8 latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks




The KES-R is latched from outside to the housing wall using the latching clips.

KES 13/24

10) Ø3.2 - 6.3mm

3) Ø16 - 20.5mm

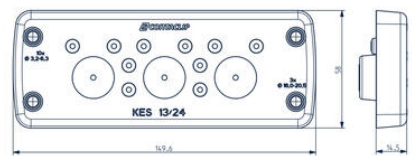

Panel cut-out for wall thickness 1.5 - 2 mm (for snap-on attachment)



You can choose one of three attachment options to fit your requirements

1. Screw-on mount



The KES (without threaded bush) is screwed from the outside onto the housing wall.

2. Screw on mount with threaded bushes and latching clips



Using the latching clips, the KES-G8 latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.

3. Latched (snap-on) mount using latching hooks



The KES-R is latched from outside to the housing wall using the latching clips.