

NIVÅBRYTER FOT VÆSKER. 1-6 BRYTERPUNKTER

NIVÅVAKT FÖR VÄTSKOR, 1-6 LARMPUNKTER -
MÄSSING

Kontakt oss for detaljer.

- Kontroll og overvåking av væsknivå
- Mediaberørte deler i messing, rustfritt eller plast
- 1-6 bryterpunkter
- Rørlengder opp til 6 meter



PRODUKTBESKRIVELSE


Nivåovervåking med opptil 6 alarmpunkter og maksimal lengde på 6 m.

- Spesialutførelse
- Flensanslutning
- N/O, N/C eller SPDT
- Andre materialer på forespørsel

TEKNISKE DATA

Brytestrøm maks.	1,3 A
Densitet min.	0,35 g/cm ³
Funksjon	Flottør, reedkontakt
IP-klasse	IP56
Kontaktbelastning maks.	80 VA
Materiale	Messing
Materiale flotør	NBR
Materiale tilkobling	Messing
Medie	Vann, olje
Montering	Topp- og bunnmontert
Måleteknologi	Nivåbryter
Område / Bruksområde	Industri

Spenning AC maks.	230 V
Temperaturområde til	105 °C
Type nivåbryter	Toppmontert

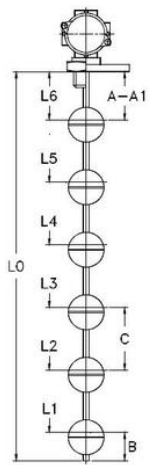

Type of float	Minimum distance (mm)				
	B13	B15	B20	B24	B44
A	20	15	15	25	35
A1	35	30	30	40	55
B	25	20	20	25	40
C	—	35	40	45	75
Max. number of contacts	1	6	6	4	3

