

MOTTAGER OG ANTENNE

RRH8

Trådløs mottager 868 MHz

- Fire reléutganger
- Paring av opptil 28 sendere/utganger
- Opptil 80 meters rekkevidde (åpent område)







PRODUKTBESKRIVELSE

RRH-mottakeren er laget for å håndtere COMEPI's batterifrie og trådløse sendere. Mottakeren har fire uavhengige reléutganger og fem forskjellige driftsmoduser. Påliteligheten til signaloverføring sammen med dens fleksibilitet og enkle installasjon er det som utmerker produktet.

TEKNISKE DATA

Kontakttype	4 NO
Materiale hus	Plast
Temperaturområde fra	-25 °C
Temperaturområde til	70 °C
Tilkobling	Skrutilkobling

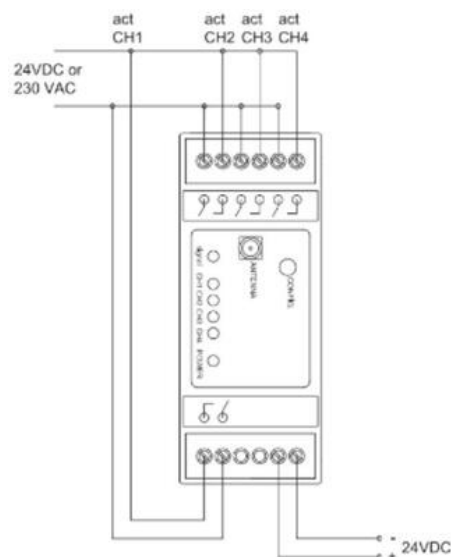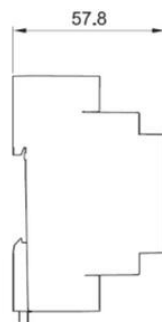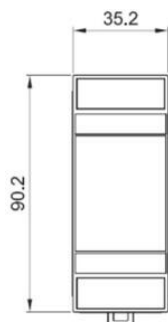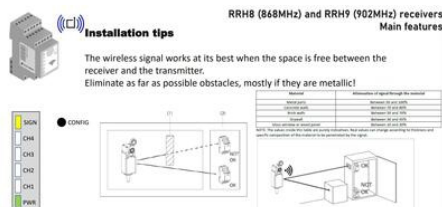





Installation tips

RRH8 (868MHz) and RRH9 (902MHz) receivers
Main features

The wireless signal works at its best when the space is free between the receiver and the transmitter.
Eliminate as far as possible obstacles, mostly if they are metallic!

- SDM
- CH4
- CH3
- CH2
- CH1
- Park

● CONFIG



Receiver	Maximum range through the window
RRH8 (868MHz)	Maximum of 100 meters
RRH9 (902MHz)	Maximum of 50 meters
RRH10 (433MHz)	Maximum of 100 meters
RRH11 (868MHz)	Maximum of 100 meters

Note: The maximum range is not guaranteed in all situations and may vary according to the situation.