

TRÅDLØSE, BATTERIFRIE ENDEBRYTERE

APWT11RFH8

Endebryter med tapp




- Ingen kabler
- Ingen batterier
- Plast eller metallhus



PRODUKTBESKRIVELSE

Etttersom det ikke behøves noen kabel tilkoblet kan installasjonen utføres kjapt og enkelt. Det trådløse batterifrie systemet gir mer fleksibilitet når det gjelder plassering av endebryteren.

Følg artikkelnummermatrisen for å bygge det produktet du trenger.

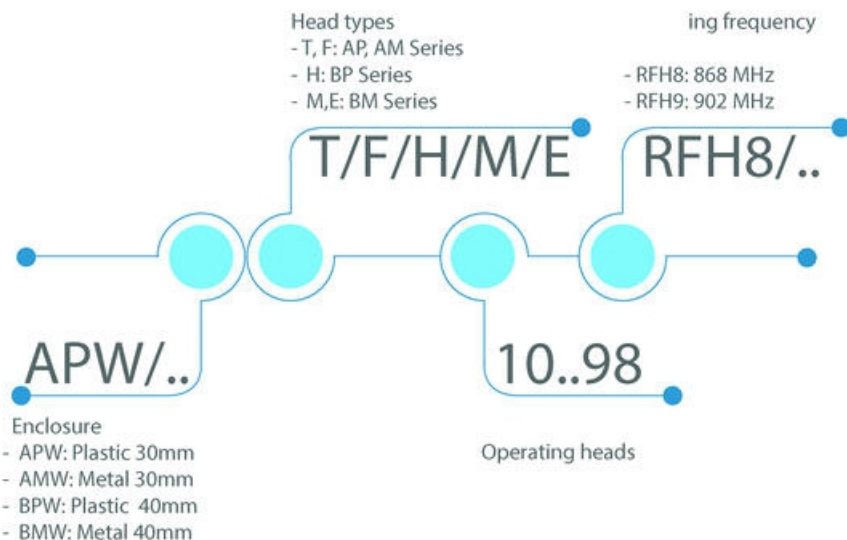

Dersom det artikkelnummer du lager i matrisen er på lager er ikke dette sikkert, kontakt oss for kontroll.

;

TEKNISKE DATA



IP-klasse	IP66
Materiale hus	Plast
Temperaturområde fra	-25 °C




Installation tips

RRH8 (868MHz) and RRH9 (902MHz) receivers
Main features

The wireless signal works at its best when the space is free between the receiver and the transmitter. Eliminate as far as possible obstacles, mostly if they are metallic!





Features	
Frequency range	868 MHz / 902 MHz
Modulation	ASK
Power	100 mW
Dimensions	53.5 x 30.3 x 14.5 mm
Weight	0.5 g
Operating temperature	-20 °C to 70 °C
Storage temperature	-40 °C to 85 °C
Humidity	5% to 95% RH
IP protection class	IP67
Material	ABS
RoHS	Compliant
REACH	Compliant
CE mark	Compliant
UL mark	Compliant
UL listing	UL 1449
UL listing	UL 1654
UL listing	UL 1950
UL listing	UL 2054
UL listing	UL 2055
UL listing	UL 2056
UL listing	UL 2057
UL listing	UL 2058
UL listing	UL 2059
UL listing	UL 2060
UL listing	UL 2061
UL listing	UL 2062
UL listing	UL 2063
UL listing	UL 2064
UL listing	UL 2065
UL listing	UL 2066
UL listing	UL 2067
UL listing	UL 2068
UL listing	UL 2069
UL listing	UL 2070
UL listing	UL 2071
UL listing	UL 2072
UL listing	UL 2073
UL listing	UL 2074
UL listing	UL 2075
UL listing	UL 2076
UL listing	UL 2077
UL listing	UL 2078
UL listing	UL 2079
UL listing	UL 2080
UL listing	UL 2081
UL listing	UL 2082
UL listing	UL 2083
UL listing	UL 2084
UL listing	UL 2085
UL listing	UL 2086
UL listing	UL 2087
UL listing	UL 2088
UL listing	UL 2089
UL listing	UL 2090
UL listing	UL 2091
UL listing	UL 2092
UL listing	UL 2093
UL listing	UL 2094
UL listing	UL 2095
UL listing	UL 2096
UL listing	UL 2097
UL listing	UL 2098
UL listing	UL 2099
UL listing	UL 2100

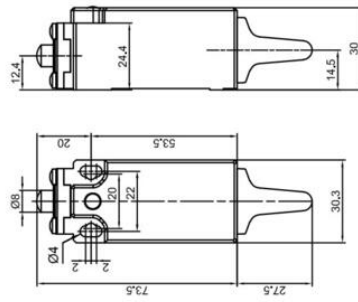

Installation tips

RRH8 (868MHz) and RRH9 (902MHz) receivers
Main features

The wireless signal works at its best when the space is free between the receiver and the transmitter. Eliminate as far as possible obstacles, mostly if they are metallic!



Features	
Frequency range	868 MHz / 902 MHz
Modulation	ASK
Power	100 mW
Dimensions	53.5 x 30.3 x 14.5 mm
Weight	0.5 g
Operating temperature	-20 °C to 70 °C
Storage temperature	-40 °C to 85 °C
Humidity	5% to 95% RH
IP protection class	IP67
Material	ABS
RoHS	Compliant
CE mark	Compliant
UL mark	Compliant
UL listing	UL 1449
UL listing	UL 1654
UL listing	UL 1950
UL listing	UL 2054
UL listing	UL 2055
UL listing	UL 2056
UL listing	UL 2057
UL listing	UL 2058
UL listing	UL 2059
UL listing	UL 2060
UL listing	UL 2061
UL listing	UL 2062
UL listing	UL 2063
UL listing	UL 2064
UL listing	UL 2065
UL listing	UL 2066
UL listing	UL 2067
UL listing	UL 2068
UL listing	UL 2069
UL listing	UL 2070
UL listing	UL 2071
UL listing	UL 2072
UL listing	UL 2073
UL listing	UL 2074
UL listing	UL 2075
UL listing	UL 2076
UL listing	UL 2077
UL listing	UL 2078
UL listing	UL 2079
UL listing	UL 2080
UL listing	UL 2081
UL listing	UL 2082
UL listing	UL 2083
UL listing	UL 2084
UL listing	UL 2085
UL listing	UL 2086
UL listing	UL 2087
UL listing	UL 2088
UL listing	UL 2089
UL listing	UL 2090
UL listing	UL 2091
UL listing	UL 2092
UL listing	UL 2093
UL listing	UL 2094
UL listing	UL 2095
UL listing	UL 2096
UL listing	UL 2097
UL listing	UL 2098
UL listing	UL 2099
UL listing	UL 2100