

2-POLT C12 RELE

Serie IRC

C12A21X12A

Interfacerele IRC 2-pol 5A LED 12V AC (EL4379103)

- 5 A
- Robust flatstift
- Fargekodet testknapp



PRODUKTBESKRIVELSE

TEKNISKE DATA

INNGANGSDATA


Arbeidsområde Un	0,8-1,10
Spoleffekt	1,1 VA
Spolespenning AC	12 V AC
Spenning min.	0,6 V
Overspenning UNX maks.	1,1
Tilslagstid	10 ms

UTGANGSDATA

Antall kontakter	2
Kontaktmateriale	AgNi + 0,2 μ Au
Brytevee spenning	250 V
Brytevee strøm	5 A
Anbefalt last maks.	5 A/250 V AC 1; 0,5A/110 V DC-1
Anbefalt last min.	10 mA/10 V
Mekanisk levetid	AC: 10Mill/. DC: 20 Mill
Støtstrøm (20ms)	15 A
Bounce-tid	1
Fraslagstid	5 ms
Fraslagstid + bounce-tid	8 ms


GENERELL DATA

IP-klasse	IP40
Isolasjon kontakt/kontakt	3000 V
Isolasjon kontakt/spole	5000 V
Skrusokkel	S-12
Frekvens	50 Hz
Tilvalg spole	X (LED)
Vekt	21 g


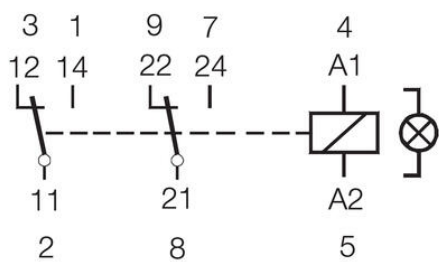


C12-A21X

5A 250V AC-1
5A 30V DC-1



A2 — A1



CE EAC
Made in India

