

ECH-SERIEECH40-10
ECH40-10

- Mulig med kundetilpassning
- IP40 // IP65
- Ta kontakt for din variant


**PRODUKTBESKRIVELSE**

ECH-serien er enkle lineære solenoider hvor slagbevegelsen utføres fra begynnelse til sluttposisjon av de elektromagnetiske kreftene. Retur til startposisjonen er skjer ved hjelp av ytre krefter, eller av en fjær som er bygd inn i magnetventilen.

TEKNISKE DATA

Absorbed power @ 20°C, 100% duty	13
Absorbed power @ 20°C, 15% duty	75
Absorbed power @ 20°C, 25% duty	45
Absorbed power @ 20°C, 40% duty	30
Absorbed power @ 20°C, 5% duty	210
Beginning of stroke force at 100% duty	9,5
Beginning of stroke force at 15% duty	30
Beginning of stroke force at 25% duty	23
Beginning of stroke force at 40% duty	18
Beginning of stroke force at 5% duty	50
End of stroke force at 100% duty	10,4
End of stroke force at 15% duty	27
End of stroke force at 25% duty	19,5
End of stroke force at 40% duty	16
End of stroke force at 5% duty	43
IP class of solenoid body and connector	IP40
IP class of solenoid mounting face	IP65

Isolasjonsklasse	B(130°C)
Slaglengde	10
Spenning AC maks.	230
Spenning AC min.	110
Spenning DC maks.	205
Spenning DC min.	6
Spenningstype	AC, DC
Vekt total	250

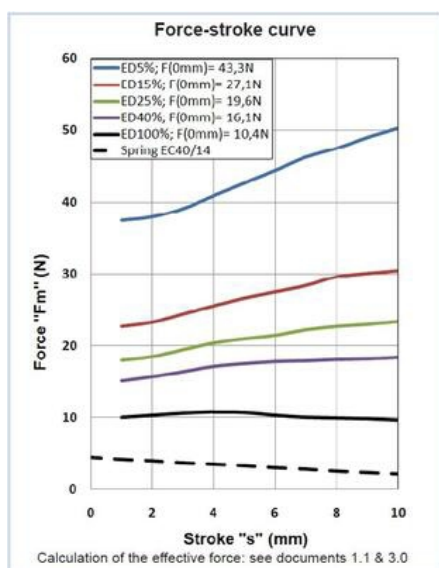

Duty-cycle	Standard voltages										Under demand voltages					
	ED%	VDC								VAC		VDC		VAC		
		6	12	24	48	100	125	205	110	230			Min	Max	Min	Max
100%	o	o	o	o	o	o	o	o	o	4	250	18	230			
40%	o	o	o	o	o	o	o	o	o	6	250	45	230			
25%	o	o	o	o	o	o	o	o	o	8	250	85	250			
15%	x	o	o	o	o	o	o	o	o	10	250	105	230			
5%	x	o	o	o	o	o	o	x	x	12	250	x	x			
Layout	o = Available ; x = Unavailable															

