

FLOW INDIKATOR

PO

PO-010GVA020
Flow-indikator 3/8" 0,1-1,5 l/m

- 0,1 - 100 l/min. vann
- G3/8" - G1"
- Maks. trykk 16 bar
- PVDF (plast)




PRODUKTBESKRIVELSE



Modell PO er en flowindikator i plast med tilkoblinger i PVDF alternativt rustfritt stål. Den har et transparent lokk for at man enkelt skal se om det er gjennomstrømning eller ikke.

TEKNISKE DATA

Flow maks.	1,5 l/min
Flow min.	0,1 l/min
Materiale hus	PPS
Materiale lager	Iglidur X
Materiale lokk	PSUU
Materiale rotor	PVDF
Materiale tetninger	Viton
Materiale tilkobling	PVDF
Materiale trommel	Keramisk
Mediatemperatur til	60 °C
Trykkområde maks.	16 bar
Type of flow component	Flowindikering
Vekt	0,1 kg



G"	Typ	B mm	C mm	L mm	L1 mm	H mm	Weight kg
3/8	PO-010	29	12,5	50	84	50	0,1
1	PO-025	53	23	70	110	70	0,4

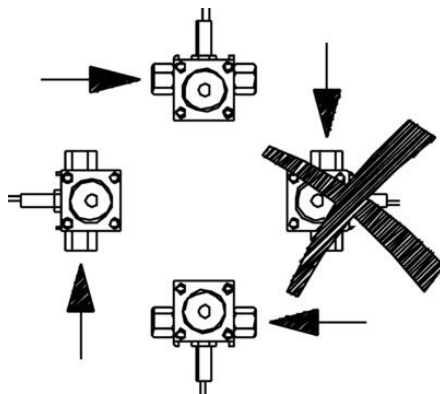

G"	Typ	B mm	C mm	L mm	L1 mm	H mm	Weight kg
3/8	PO-010	29	12,5	50	84	50	0,1
1	PO-025	53	23	70	110	70	0,4

