



PANELMONTERT SUMMER SERIE M22

812500405

ESK Summer Ø30mm 65dB 12-24V AC/DC
(EL6202990)

- Opp til 105 dB
- Justerbar volum
- Fast eller pulserende tone
- Montering i 22,5mm eller 30,5mm hull



PRODUKTBESKRIVELSE

Panelmontert summer med bredt spenningsområde og høy kapslingsklasse, IP65. Utmerket om man ønsker å påkalle ekstra oppmerksomhet.

TEKNISKE DATA



Antall tilvalgsmoduler	0 pc
Antall toner	2 pc
Diameter	30 mm
Farge hus	Svart
IP-klasse	IP65
Koblingsklemme	2,5 mm ²
Lydnivå maks.	65 dB
Lydnivå min.	65 dB
Matespenning AC/DC maks.	24 V
Matespenning AC/DC min.	10 V
Nominell strøm maks.	0,04 A
Nominell strøm min.	0,04 A
Temperaturområde fra	-25 °C
Temperaturområde til	60 °C

Tonfrekvens maks.	3500 Hz
Vekt	30 g

Tone table

Tone and frequency		
La	N	Lb
X	X	pulling tone
X	X	cardiac monitor tone

ESK

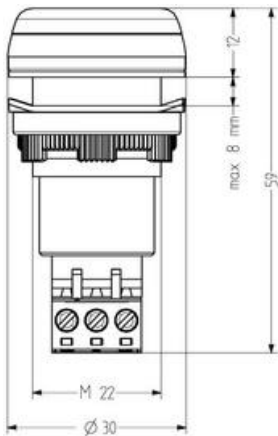

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80
100																
200																
500																

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym med hjälp av potentiometer, (ej ESK.)

