



PANELMONTERT SUMMER SERIE M22

813500313

ESM Summer Ø45mm 100dB 240V AC

- Opp til 105 dB
- Justerbar volum
- Fast eller pulserende tone
- Montering i 22,5mm eller 30,5mm hull



PRODUKTBESKRIVELSE

Panelmontert summer med bredt spenningsområde og høy kapslingsklasse, IP65. Utmerket om man ønsker å påkalle ekstra oppmerksomhet.

TEKNISKE DATA


Antall tilvalgsmoduler	0 pc
Antall toner	2 pc
Diameter	45 mm
Farge hus	Svart
IP-klasse	IP65
Koblingsklemme	2,5 mm ²
Lydnivå maks.	100 dB
Lydnivå min.	85 dB
Matespenning AC maks.	260 V AC
Matespenning AC min.	150 V AC
Nominell strøm maks.	0,04 A
Nominell strøm min.	0,04 A
Strømforbruk maks.	0,04 A
Temperaturområde fra	-25 °C

Temperaturområde til	60 °C
Tonfrekvens maks.	3300 Hz
Tonfrekvens min.	50 Hz
Vekt	35 g

Tone table

Tone on terminals			
Set	W	GB	
X	X		pulling tone
X	X	X	continuous tone

ESM

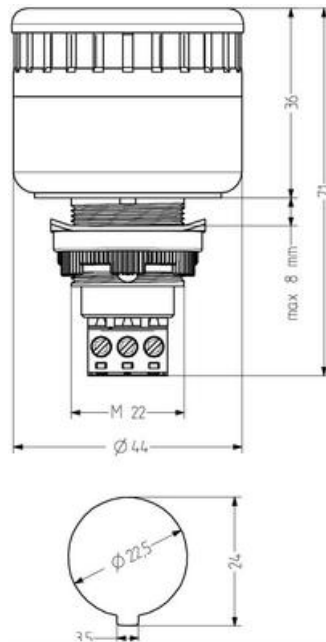

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80
50	31	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76
100	27	32	37	42	47	52	54	56	58	60	62	64	66	68	70	72
200	23	28	33	38	43	48	50	52	54	56	58	60	62	64	66	68
500	19	24	29	34	39	44	46	48	50	52	54	56	58	60	62	64

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

