

NIVÅBRYTER FOT VÆSKER. 1-6 BRYTERPUNKTER

NIVÅVAKT FÖR VÄTSKOR, 1-6 LARMPUNKTER -
MÄSSING

Kontakt oss for detaljer.


- Kontroll og overvåking av væskenivå
- Mediaberørte deler i messing, rustfritt eller plast
- 1-6 bryterpunkter
- Rørlengder opp til 6 meter



PRODUKTBESKRIVELSE

TEKNISKE DATA

Brytestrøm maks.	1,3 A
Densitet min.	0,35 g/cm ³
Funksjon	Flottør, reedkontakt
IP-klasse	IP56
Kontaktbelastning maks.	80 VA
Materiale	Messing
Materiale flottør	NBR
Materiale tilkobling	Messing
Medie	Vann, olje
Montering	Topp- og bunnmontert
Spenning AC maks.	230 V
Temperaturområde til	105 °C
Type nivåbryter	Toppmontert

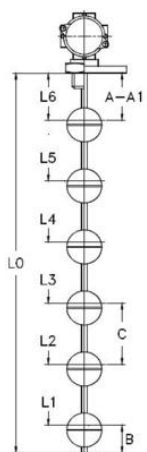

Type of float	Minimum distance (mm)				
	B13	B15	B20	B26	B44
A	20	15	15	25	30
A1	35	30	30	40	55
B	25	20	20	25	40
C	—	35	40	45	75
Max. number of contacts	1	6	6	4	3

