

ECM-SERIE

ECM13-03/E
ECM13-03/E

- Mulig med kundetilpassning
- Egnet for montering i paneler
- Ta kontakt for din variant




PRODUKTBESKRIVELSE

ECM-serien er lineære elektromagneter hvor hele slagbevegelsen fra begynnelse til sluttposisjon utføres av elektromagnetiske krefter. Retur til startposisjon gjøres ved hjelp av ytre krefter, eller med en innebygd fjær (avhengig av type). Designet gjør den perfekt for montering på paneler.

TEKNISKE DATA

Absorbed power @ 20°C, 100% duty	1 W
Absorbed power @ 20°C, 15% duty	6,6 W
Absorbed power @ 20°C, 25% duty	4 W
Absorbed power @ 20°C, 40% duty	2,5 W
Absorbed power @ 20°C, 5% duty	20 W
Beginning of stroke force at 100% duty	0,02 N
Beginning of stroke force at 15% duty	0,2 N
Beginning of stroke force at 25% duty	0,12 N
Beginning of stroke force at 40% duty	0,08 N
Beginning of stroke force at 5% duty	0,5 N
End of stroke force at 100% duty	0,15 N
End of stroke force at 15% duty	1 N
End of stroke force at 25% duty	0,69 N
End of stroke force at 40% duty	0,43 N
End of stroke force at 5% duty	2,29 N
IP-klasse	IP30
Isolasjonsklasse	B (130°C)

Slaglengde	3 mm
Spenning DC maks.	205 V
Spenning DC min.	6 V
Spenningstype	DC
Vekt total	25 g

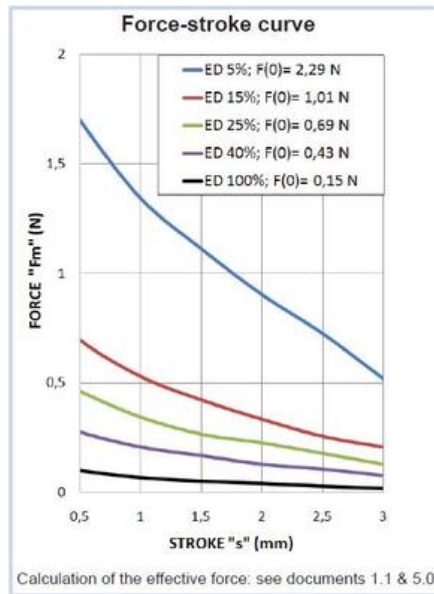

Duty-cycle ED%	Standard voltages										Under demand voltages			
	VDC					VAC					VDC		VAC	
	6	12	24	48	100	125	205	110	230		Min	Max	Min	Max
100%	o	o	o	x	x	x	x	x	x	1,5	24	x	x	x
40%	o	o	o	o	x	x	x	x	x	1,5	48	x	x	x
25%	o	o	o	o	x	x	x	x	x	1,5	48	x	x	x
15%	o	o	o	o	x	x	x	x	x	1,5	48	x	x	x
5%	o	o	o	o	o	x	x	x	x	3	110	x	x	x

Layout: o = Available ; x = Unavailable

