

## Specifications

For other materials or modifications, please consult TESCO M.

### OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

#### Maximum Inlet Pressure

600 or 3500 psig / 41.4 or 241 bar

#### Outlet Pressure Ranges

30, 60, or 100 psig / 2.1, 4.1, or 6.9 bar

#### Design Proof Pressure

150% of maximum rated

#### Inboard Leak Rate

$1 \times 10^{-9}$  atm cc/sec He

#### Operating Temperature

**PCTFE Seat:** -40°F to 140°F / -40°C to 60°C

**Vespel® Seat:** -40°F to 350°F / -40°C to 177°C

#### Flow Capacity

$C_v = 0.06$  (3500 psig / 241 bar model)

$C_v = 0.15$  (600 psig / 41.4 bar model)



### MEDIA CONTACT MATERIALS

#### Body

316L VAR Stainless Steel Electropolish

#### Diaphragm

316L Stainless Steel

#### Seat

PCTFE (Polyimide (Vespel®) Optional for 3500 psig / 241 bar model)

#### Valve Stem

316 Stainless Steel

#### Rear Seal

316 Stainless Steel

### OTHER

#### Internal Surface Finish

10  $R_a$  microinch / 0.25 micrometer

#### Connections

Welded female or male VCR®

Tube stubs

High Purity Internal Connections (H.P.I.C.)

(Internal style of VCR®, compatible with male swivel VCR®)

#### Cleaning

DI water electronic grade cleaned and ES 500 Particle Certified for internal electropolish models

#### Internal Volume

2.9 cc

#### Weight (without gauges)

2.0 lbs / 0.9 kg

Vespel® is a registered trademark of E.I. du Pont de Nemours and Company.

VCR® is a registered trademark of Cajon Co.

### NOTE:

When choosing a regulator and control pressure, decaying inlet characteristic must be considered when the supply pressure is expected to change. The decaying inlet characteristic of a pressure reducing regulator is commonly known as the increase in control pressure due to the decrease in supply pressure. It is important to make sure this effect does not cause the control pressure to exceed the pressure rating of the unit's outlet or that of the downstream system.

For more information on decaying inlet, please refer to the Technical Information section of the product catalog and/or contact the TESCO M customer support further assistance.

TESCOM 74-2400 Series ultra high purity, tied diaphragm pressure reducing regulator provides low internal volume and an internally springless and threadless design. The 74-2400 Series offers a 10  $R_a$  surface finish and 316 Stainless Steel VAR. Inlet pressures are 600 or 3500 psig / 41.3 or 241 bar with outlet pressures up to 100 psig / 6.9 bar.

### Applications


- 1/4" point-of-use
- Gas cabinets
- Semiconductor manufacturing
- Valve manifold boxes
- Research labs

### Features and Benefits

- Manufactured and tested using Total Quality tools including Statistical Process Control
- No internal springs and a low internal volume minimizes particle entrapment
- Metal-to-metal seal at diaphragm or body interface
- 10  $R_a$  microinch / 0.25 micrometer finish is available


# 74-2400 SERIES

## 74-2400 Series Regulator Drawing


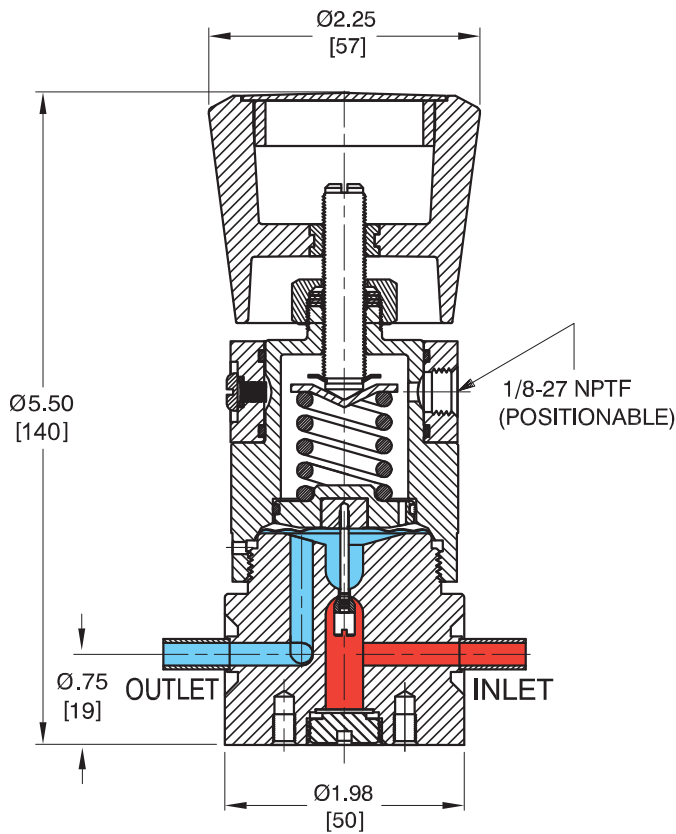


### GAUGE PORT OPTIONS


**Figure A (no gauges)**





**Figure B (2 gauges)**



**Figure C (1 gauge)**



**Figure D (2 gauges)**

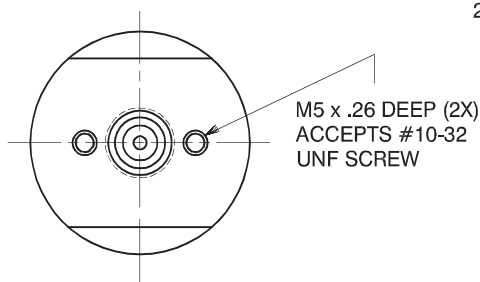


### MOUNTING INFORMATION

All dimensions are reference & nominal  
Metric [millimeter] equivalents are in brackets

74-2400 Series Regulator Flow Chart

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on [www.tescom.com](http://www.tescom.com).

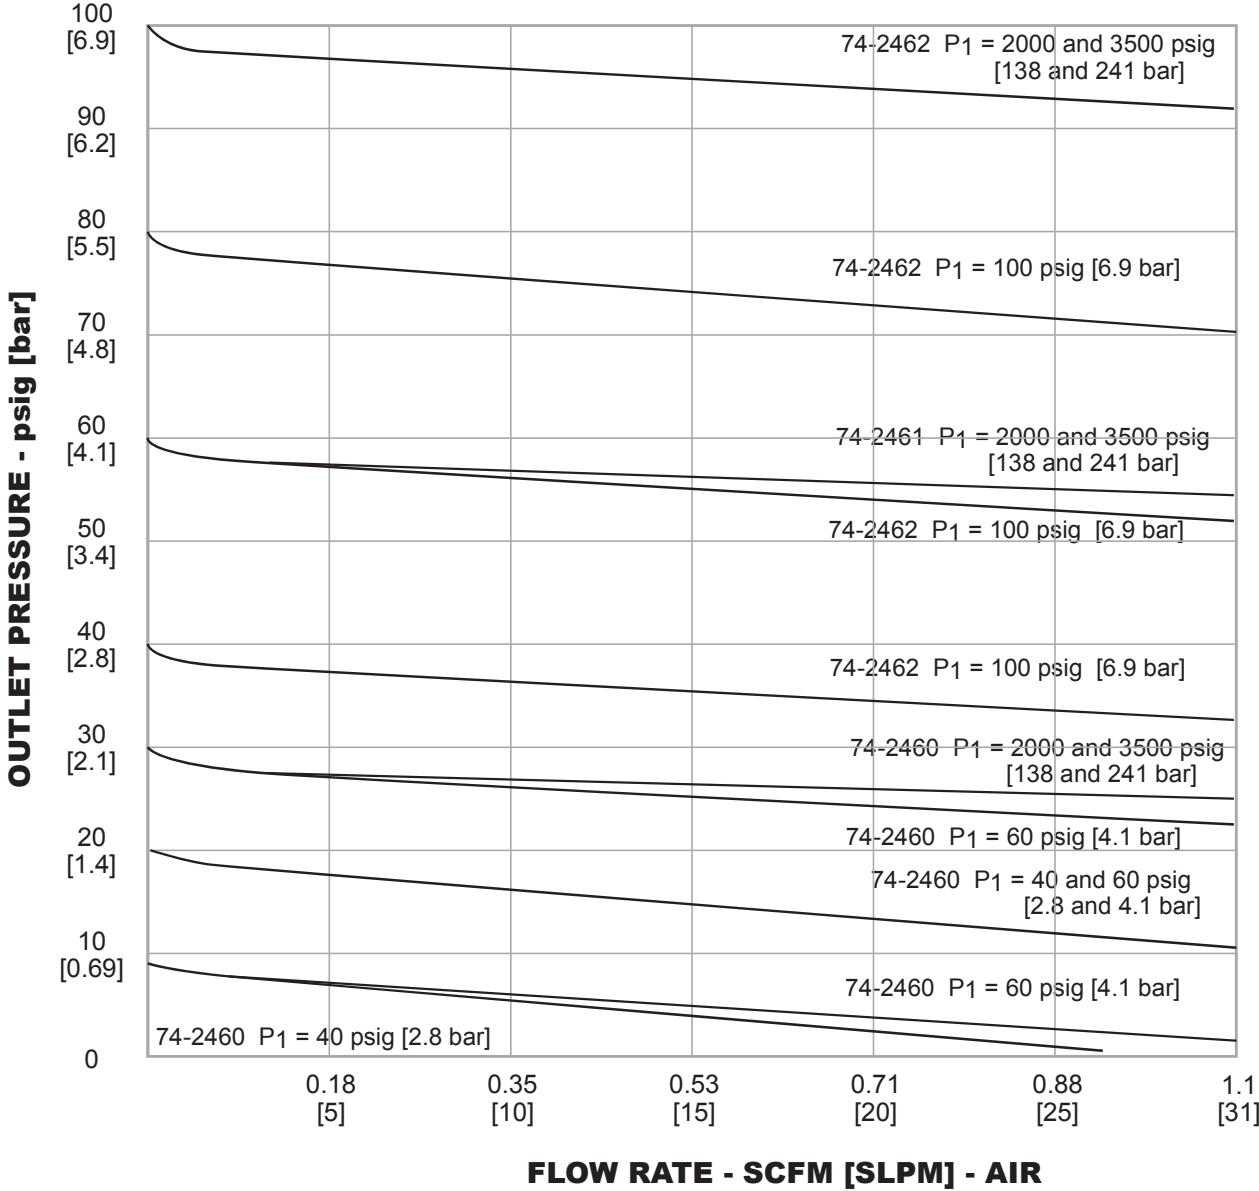

# 74-2400 SERIES

## 74-2400 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

74-24	6	2	K	A4	1	0		
BASIC SERIES	BODY MATERIAL / FINISH	OUTLET PRESSURE RANGES	SEAT MATERIAL	INLET AND OUTLET PORT SIZE AND TYPE	'A' ± 0.06"	MAXIMUM INLET PRESSURE	GAUGE PORT OPTIONS	NUMBER OF GAUGE PORTS (FIGURE)
74-24	6 – 316L VAR Stainless Steel Electropolish: 10 R <sub>a</sub> <sup>1</sup>  <div style="border: 1px solid black; padding: 2px; width: fit-content;">1. Per SEMI F19, UHP grade</div>	0 – 30 psig 2.1 bar  1 – 60 psig 4.1 bar  2 – 100 psig 6.9 bar	K – PCTFE (standard)  V – Polyimide (Vespel®) (3500 psig / 241 bar model only)	A4 – 1/4" H.P.I.C. RK – 1/2" Male Swivel RL – 1/2" Female Swivel RM – 1/4" Male Swivel RT – 1/4" Female Swivel RU – IN Port: 1/4" Male; OUT Port: 1/4" Female RV – IN Port: 1/4" Female; OUT Port: 1/4" Male T4 – 1/4" Tube Stubs	1.09" 4.75" 4.75" 3.70" 3.70" 3.70" 3.70"	1 – 3500 psig 241 bar  2 – 600 psig 41.4 bar	0 – None 1 – 1/4" H.P.I.C. 2 – 1/4" H.P.I.C. 3 – 1/4" H.P.I.C. 4 – 1/4" Male Swivel 5 – 1/4" Male Swivel 6 – 1/4" Male Swivel 7 – 1/4" Female Swivel 8 – 1/4" Female Swivel 9 – 1/4" Female Swivel S – 1/4" Fixed Male T – 1/4" Fixed Male U – 1/4" Fixed Male	0 (Figure A) 1 (Figure C) 2 (Figure B) 2 (Figure D) 2 (Figure D) 1 (Figure C) 2 (Figure B) 2 (Figure D) 1 (Figure C) 2 (Figure B) 2 (Figure B) 1 (Figure C) 2 (Figure B) 1 (Figure C)