



Product designation
Product type designation
Motor type

Soft starter NFC
ADXNF
Asynchronous
three phase

Electrical features

Supplies voltage	Type of system		Three phase
	Rated supply voltage	V	208...600VAC
	auxiliary supply voltage (Us)		100...240VAC
	Rated frequency	Hz	50/60
Rated starter current Ie		A	6
Rated motor power	IEC ratings (T=40°C)		
	230VAC	kW	1.1
	400VAC	kW	2.2
	500VAC	KW	3
	UL ratings (T=40°C)		
	220-240VAC	HP	1.5
	380-415VAC	HP	2
	440-480VAC	HP	3
	550-600VAC	HP	5
Number of controlled phases		Nr.	2
Built-in bypass			Yes
Cooling System			Natural or forced (optional)
Rated insulation voltage Ui		V	600
Programming interface			
Display			No
Programming with NFC technology			Yes
Optical port			No
Startup and stop settings			
Startup method			Voltage ramp
Stop method			Voltage ramp or free-wheel stop
Acceleration ramp		s	1-20
Deceleration ramp		s	0-20
Startup voltage		%	30-80
Protections			
Power supply Protection			No power line, phase loss, frequency out of limits, minimum and maximum voltage and phase sequence
Starter protection			Overtemperature

Input and Output

Digital inputs

Number of digital input	Nr.	1
Digital input type		Volt-free contact
Digital input functions		Motor start

Digital outputs

Number of digital output	Nr.	2
Digital output arrangement		2 NO contacts with the same common, 5A 250VAC AC1 - 5A 30 VDC
Digital output functions		Programmable: line contactor (Run), TOR (Top Of Ramp), alarm

Communication interfaces

Communication interface

NFC

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60°C (with current derating >40°C)

Storage temperature

min	°C	-30
max	°C	+80

Max altitude

m 1000 without derating of the starter current

Relative humidity

% <80%

Pollution degree

2

Installation category

III

Housing

Mounting

Screw-fixing or 35mm DIN rail (IEC/EN/BS 60715)

IP degree of protection

IP20


Dimensions (W x H x D)

mm 45 x 139 x 113.4

Weight

Kg 0.45

Dimensions

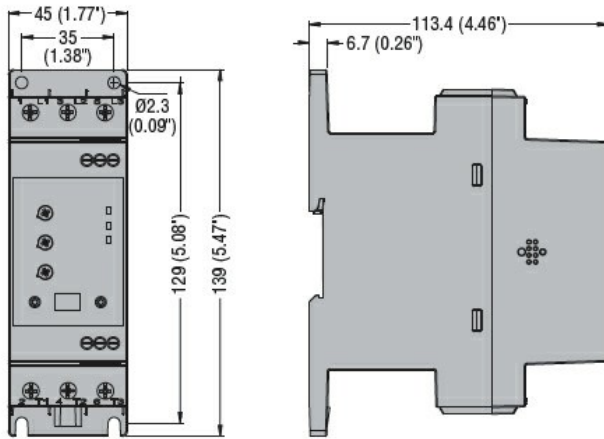

Certifications and compliance

Compliance

CSA C22.2 n° 60947-4-2

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

EAC

RCM (pending)

ETIM classification

ETIM 8.0

EC000640 - Soft
starter