


TRÅDLØSE, BATTERIFRIE FOTPEDALER

PSW11RFH8



PRODUKTBESKRIVELSE

Følg artikkelnummermatrisen for å bygge det produktet du trenger.

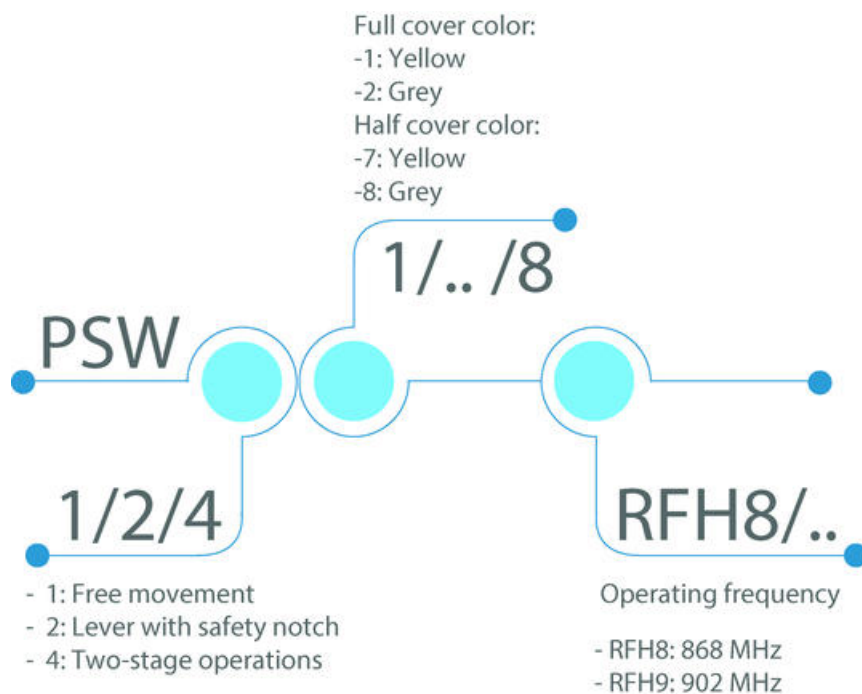

Dersom det artikkelnummer du lager i matrisen er på lager er ikke dette sikkert, kontakt oss for kontroll.

;

TEKNISKE DATA

IP-klasse

IP66

Materiale hus	Plast
Temperaturområde fra	-25 °C
Temperaturområde til	70 °C



**Installation tips**

RRH8 (868MHz) and RRH9 (902MHz) receivers
Main features


The wireless signal works at its best when the space is free between the receiver and the transmitter.
Eliminate as far as possible obstacles, mostly if they are metallic!





● CONFIG



Feature	Description of signal strength (dBm)
RRH8 (868MHz)	Receiver: -100 to -120 dBm
RRH9 (902MHz)	Receiver: -100 to -120 dBm
RRH8 (868MHz)	Receiver: -100 to -120 dBm
RRH9 (902MHz)	Receiver: -100 to -120 dBm



● CONFIG



Feature	Description of signal strength (dBm)
RRH8 (868MHz)	Receiver: -100 to -120 dBm
RRH9 (902MHz)	Receiver: -100 to -120 dBm
RRH8 (868MHz)	Receiver: -100 to -120 dBm
RRH9 (902MHz)	Receiver: -100 to -120 dBm

