

SIKKERHETSRELE NST-2009D

42080021
 NST-2009D, 24V AC/DC

- Forsinkede utganger
- 4NO + 1NC
- 24V AC/DC




PRODUKTBESKRIVELSE

Duelco sitt NST-2009D har 4NO + 1NC utganger. Led-indikering for status og kategori 4 sikkerhetsnivå.

TEKNISKE DATA

Godkjenninger	CE, cULus
IP-klasse kåpe	IP40
IP-klasse tilkobling	IP20
Kategori sikkerhet	4
Matespenning	24V AC/DC
PL	e
Safety outputs NO	4
Signal output NC	1
Temperaturområde fra	-25 °C
Temperaturområde til	50 °C
Toleranse	±10%

RESET TYPES




TIME DELAY TABLE - 0 - 600 SEC.







	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1	1.1	1.2	1.3	1.4	1.5	
0.25	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	8	9	10	
1.5	3	6	9	12	15	18	21	24	27	30	36	42	48	54	60	
15	30	60	90	120	150	180	210	240	270	300	360	420	480	540	600	

STATUS TABLE, LED'S


LED U0	LED K1	LED K2	LED K3	LED K4	Interpretation / Possible Fault (depends on which connection example is being used)
ON	OFF	OFF	OFF	OFF	Supply OK
OFF	OFF	OFF	OFF	OFF	Supply not connected or missing / bad connection
ON	Blinking	Blinking	Blinking	Blinking	Monitoring circuit has not detected any faults and the relay is ready for reset
ON	ON	ON	ON	ON	Relay activated
ON	OFF	OFF	ON	ON	Emergency stop activated, time delay still active

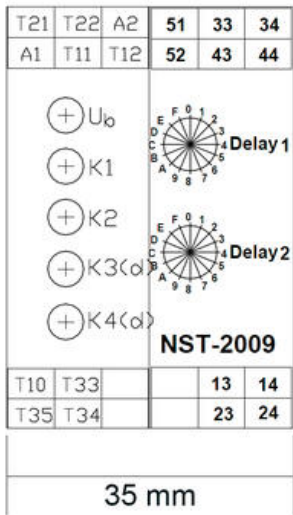

Depth 114,50mm

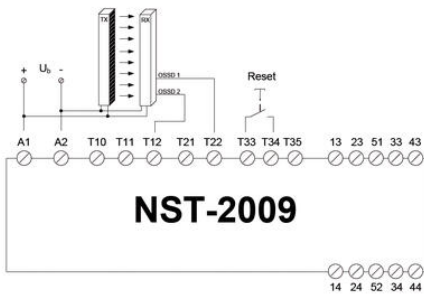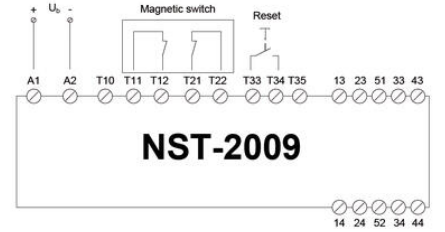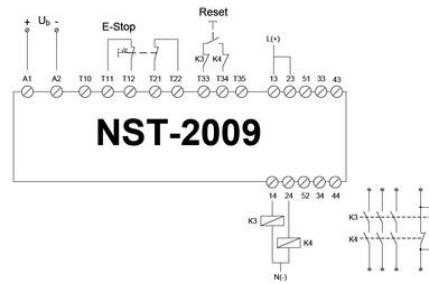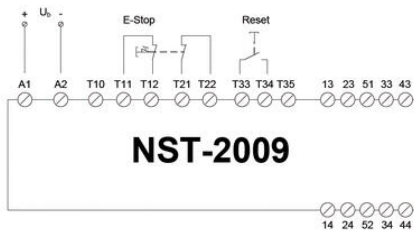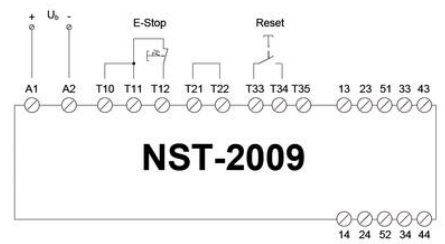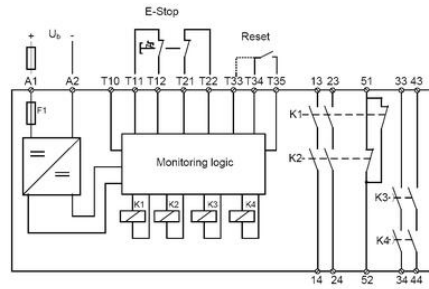

RESET TYPES




TIME DELAY TABLE - 0 - 600 SEC.

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
ON	0,05	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1	1,1	1,2	1,3	1,4	1,5
ON	0,25	0,5	1	1,5	2	2,5	3	3,5	4	4,5	5	6	7	8	9	10
ON	1,5	3	6	9	12	15	18	21	24	27	30	36	42	48	54	60
ON	15	30	60	90	120	150	180	210	240	270	300	360	420	480	540	600

STATUS TABLE, LED'S

LED U0	LED K1	LED K2	LED K3	LED K4	Interpretation / Possible Fault (depends on which connection example is being used)
ON	OFF	OFF	OFF	OFF	Supply OK
OFF	OFF	OFF	OFF	OFF	Supply not connected or missing / bad connection
ON	Blinking	Blinking	Blinking	Blinking	Monitoring circuit has not detected any faults and the relay is ready for reset
ON	ON	ON	ON	ON	Relay activated
ON	OFF	OFF	ON	ON	Emergency stop activated, time delay still active

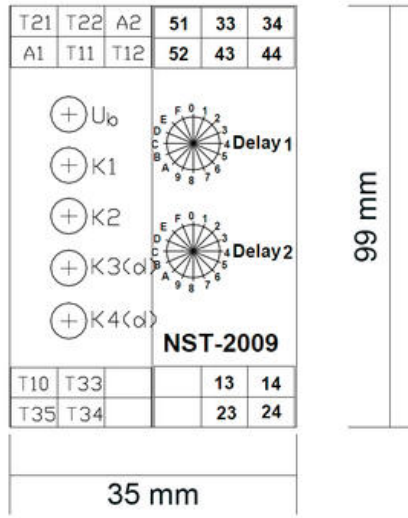

99 mm

Depth 114,50mm

