

TERMOELEMENT PANELER

TC-728-200

Kontaktpanel standard 1-kanal, numererte, 37x67 mm



- 1-24 kanaler
- Med montasjehull i hjørnene
- Numererte
- Horisontale



PRODUKTBESKRIVELSE

Fra TC Ltd tilbyr vi et antall ferdighullede paneler for termoelement kontakter.

Med disse er det raskere å montere, spesielt når flere kontakter skal monteres. De har ferdige hull for ønsket antall kanaler/kontakter og 4 forsenkede hull (Ø4,5 mm), ett i hvert hjørne for at det skal være enkelt å montere på en maskin eller i et panel på et elektroskap.


Her viser vi kontakter av standard størrelse med horisontal plassering av hull (miniatyr kontakter og vertikal plassering av hull finnes på forespørsel).

Panelene finnes med 1, 2, 4, 6, 8, 10, 12, 16, 20 og 24 kanaler

Panelene med 16, 20 og 24 kanaler har hullene plassert 2 rader.

Se mål i den nedlastningsbare Spectherm-katalogen under downloads : Side 13 for miniatyr kontakter og side 31 for standard kontakter. Panelene er de som har betegnelse RFH.

Hunn konakter for panelet bestilles separat.

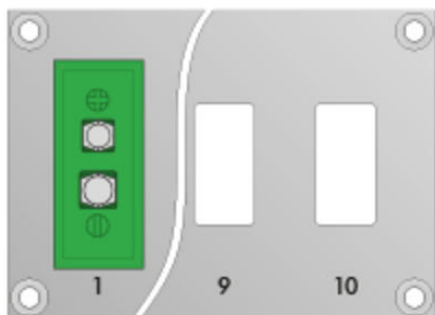

For use with Spectherm R20, R20B and R24		RSP / RSP	RSS / RSS	RPH	RPL
		Panel without panel mounting holes	Panel with panel mounting holes	Horizontal standard panel with panel mounting holes	Vertical standard panel with panel mounting holes
					
R20 R20B R24* (standard size)		A B	A B	A B	A B
No. of Channels	Dimensions A x B in mm	RSP Aluminium Panel	RSP Stainless Steel Panel	RSS Aluminium Panel	RSS Aluminium Panel
1	37 x 67	RFH01	RFH01	RFH01	RFH01
2	67 x 67	RFH02	RFH02	RFH02	RFH02
4	112 x 67	RFH04	RFH04	RFH04	RFH04
6	162 x 67	RFH06	RFH06	RFH06	RFH06
8	212 x 67	RFH08	RFH08	RFH08	RFH08
10	262 x 67	RFH10	RFH10	RFH10	RFH10
12	312 x 67	RFH12	RFH12	RFH12	RFH12
16	362 x 113	RFH16	-	RFH16	RFH16
20	362 x 113	RFH20	-	RFH20	RFH20
24	362 x 113	RFH24	-	RFH24	RFH24

These panels are suitable for use with the following connectors, which should be ordered separately:
R20 - Standard Flanged Panel Socket with Bracket, R20B - Standard Flanged Panel Socket with Spring Clip, R24 - Standard High Temp Flanged Panel Socket with Bracket
Note: Aluminium Panels are rated to 200°C which is lower than the rating of the connectors marked with an asterisk (*)